

## Tile roof | clamping system top-fix

Clamping system with modules installed in portrait



### Powerful, stable and flexible

- components usable across different roof types
- module landscape installation possible with cross layer system
- only two clamps for all frame heights in blank and black anodized

### product variants

- flex roof hook for low loads
- roof hook versions for 40mm battens available
- double roof hooks for heavy loads
- rails and clamps available in blank and black anodized

### Your benefits


- three-way adjustable roof hook to level out uneven roofs, for different tile strengths and shapes
- quick mounting from above with easily graspable components
- narrow tile gap and centric load distribution
- the C-rail also acts as a cable channel




Double roof hooks for heavy snow loads



C47 S rail connectors for profile clammers

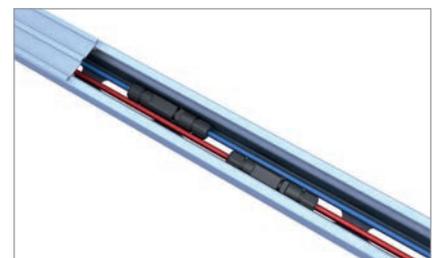

C-rail as cable channel

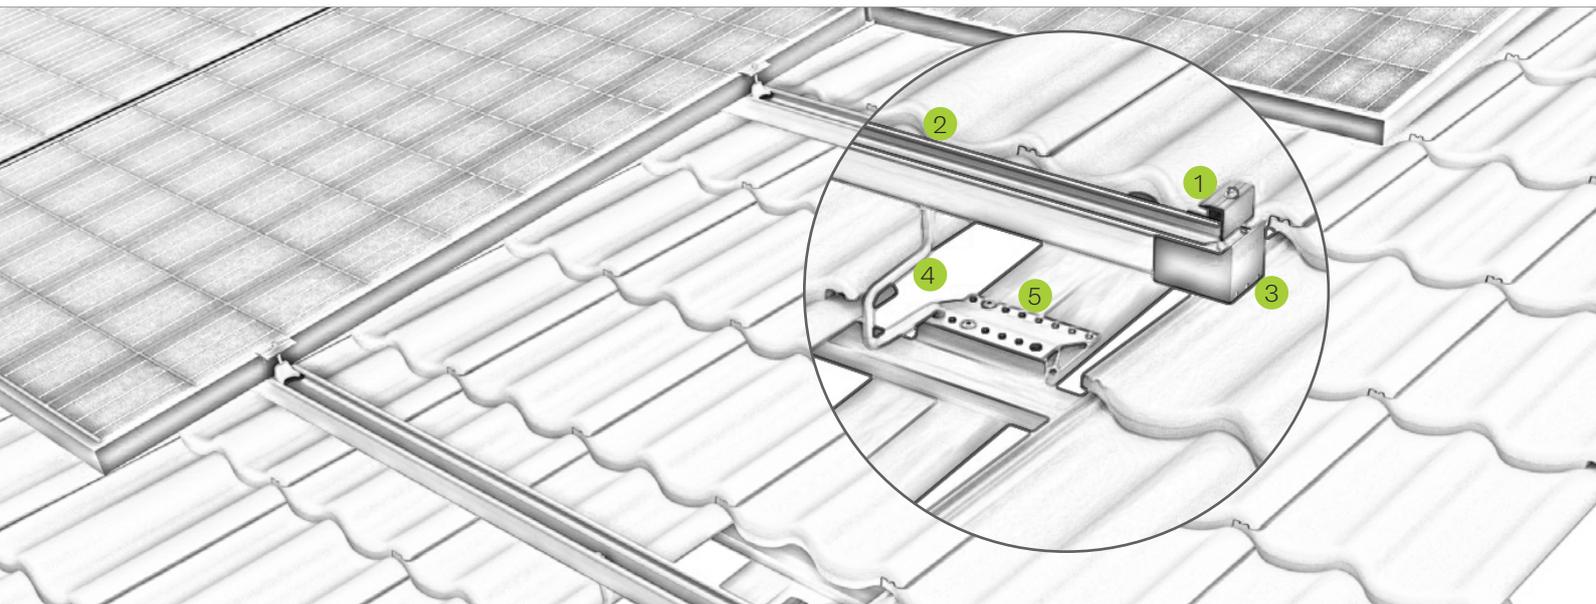

## Pic Designation

- ① **Middle and end clamp**
- for frame heights of 30-42 mm and 43-52 mm
  - installation-friendly thanks to click-in mechanism

- ② **C-rail**
- available in different strength and lengths
  - can be stepped on throughout installation

- ③ **End cap**
- for optically tidy rail ends
  - UV and weather resistant

- ④ **Roof hook**
- three-way adjustable for perfect installations
  - various roof hooks for low and high load situations

- ⑤ **Screws**
- building authority-approved
  - Ø 6 / 8 mm available in different lengths



Light roof hooks for narrow rafters



Variations of C-rail

Mounting video



novotegra GmbH  
Eisenbahnstraße 150 | 72072 Tübingen | Deutschland  
Tel. +49 7071 98987-0, info@novotegra.com  
www.novotegra.com

Subject to changes and errors excepted.  
Last updated: April 2021 / TP