

Roof sealing membranes


Clamping system

Anchor solution on pitched roof



+ Clamping system with direct fixing

- Compatible with a wide range of anchor products
- Can be planned in Solar-Planit with individual anchor products
- Easy installation from above with large components
- Centric load distribution in the anchor
- Quick and material-saving installation thanks to single-layer design
- Positioning of the rails in the optimum clamping area of the modules
- Stable C-rail as module support rail
 - Large spans possible
 - Rail also serves as cable channel

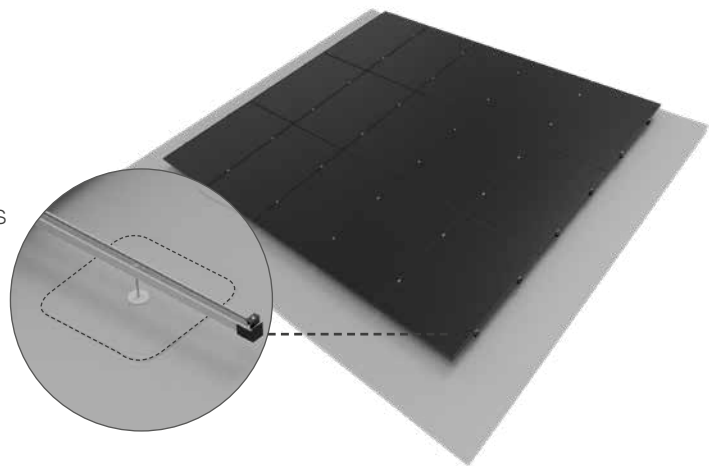

Requirements & features	
Application	Pitched roof
Roof pitch	0–60 degrees
Roof covering	Bitumen, foil (PVC, TPO, FPO)
Roof mounting	Anchors (on-site installation)
Height compensation	Depending on the anchor To compensate for uneven roofs
Module type	Framed modules
Module dimensions	Up to 1.34 m wide, no length restriction
Module installation	Portrait/landscape
Module mounting	Module clamps
Module field size	Up to 40 m connected rail length
Rail mounting	Single layer
Potential bonding	Optional
Lightning protection	Optional
Material	Aluminium, steel, plastic
Fire behaviour	A 1
Corrosion class	C 4
Warranty	12 years

roof mounting	 anchor
profile rail	 C-rail
module mounting	 clamping system

