

# Roof sealing membranes


## Clamping system

### Anchor solution on pitched roof



#### + Clamping system with direct fixing

- Compatible with a wide range of anchor products
- Can be planned in Solar-Planit with individual anchor products
- Easy installation from above with large components
- Centric load distribution in the anchor
- Quick and material-saving installation thanks to single-layer design
- Positioning of the rails in the optimum clamping area of the modules
- Stable C-rail as module support rail
  - Large spans possible
  - Rail also serves as cable channel

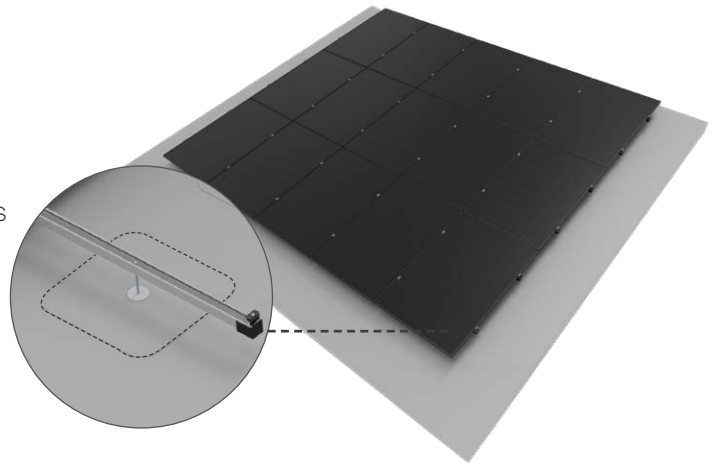

Requirements & features	
Application	Pitched roof
Roof pitch	0–60 degrees
Roof covering	Bitumen, foil (PVC, TPO, FPO)
Roof mounting	Anchors (solution provided by the customer)
Height compensation	Depending on the anchor To compensate for uneven roofs
Module type	Framed modules
Module dimensions	Up to 1.34 m wide, no length restriction
Module installation	Portrait/landscape
Module mounting	Module clamps
Module field size	Up to 40 m connected rail length
Rail mounting	Single layer
Potential bonding	Optional
Lightning protection	Optional
Material	Aluminium, steel, plastic
Corrosion class	C 4
Warranty	12 years

roof mounting	 <p><b>anchor</b></p>
profile rail	 <p><b>C-rail</b></p> <p>● black &amp; blank</p>
module mounting	 <p><b>clamping system</b></p> <p>● black &amp; blank</p>

