


Bitumen & foil pitched roof




+ Clamping system with direct fastening

- Compatible with a wide range of anchor products
- Can be planned in Solar-Planit with individual anchor products
- Easy installation from above with large components
- Centric load distribution into the anchor
- Quick and material-saving installation thanks to single-layer construction
- Positioning of the rails in the optimum clamping area of the modules
- Stable C-rail as module support rail
- Large spans possible
- Rail also serves as a cable channel

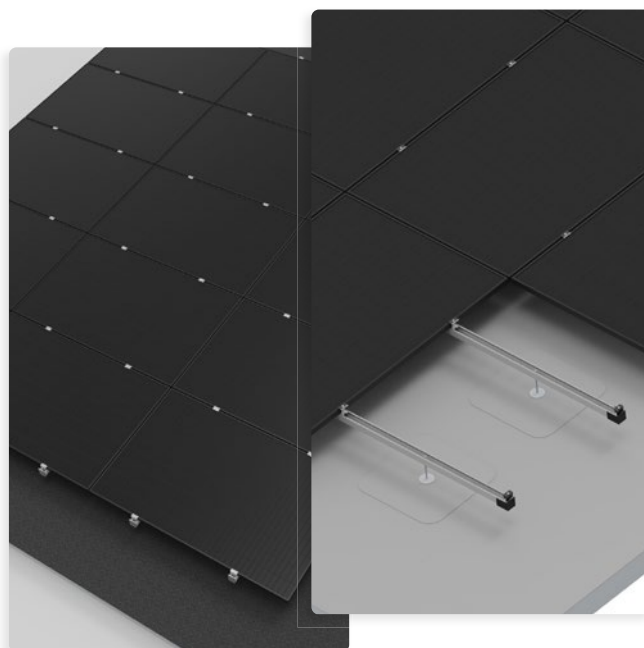


Requirements & Features	
Application	Pitched roof
Roof pitch	0 – 60°
Roof covering	Bitumen, membrane (PVC, TPO, FPO)
Roof attachment	Anchors (solution provided by customer)
Height compensation	Depending on the anchor
Module orientation	Vertical and horizontal
Module attachment	Clamping system
Module dimensions	Length: no restrictions Width: up to 1340 mm
Module field size	Up to 40 m (with expansion joints)
Lightning protection	Yes
Potential equalisation	Optional
Corrosion class	C4
Fire behaviour	A1
Warranty	12 years

System Setup	
Roof attachment	 Anchor (third-party item)
Mounting rail	 C-Rail ● black & blank
Module attachment	 Clamping system ● black & blank



Bitumen



Membrane