


Insertion system

Brickwork facades



+ Fastening solution for cold facades

- Few components, completely pre-assembled
- Modules can be mounted vertically or with horizontal mounting
- Quick module installation thanks to insertion system
- High-quality appearance thanks to closed module field
- No wind noise from rattling modules
- Low contamination of modules thanks to targeted water drainage in the insertion rail
- Cover as visual finish to the module field at the top or bottom
- Can be installed on most common substrates
- Can be planned with a variety of commercially available fasteners (plastic dowels, concrete screws, etc.)
- Easy attachment of the C-rail without additional components

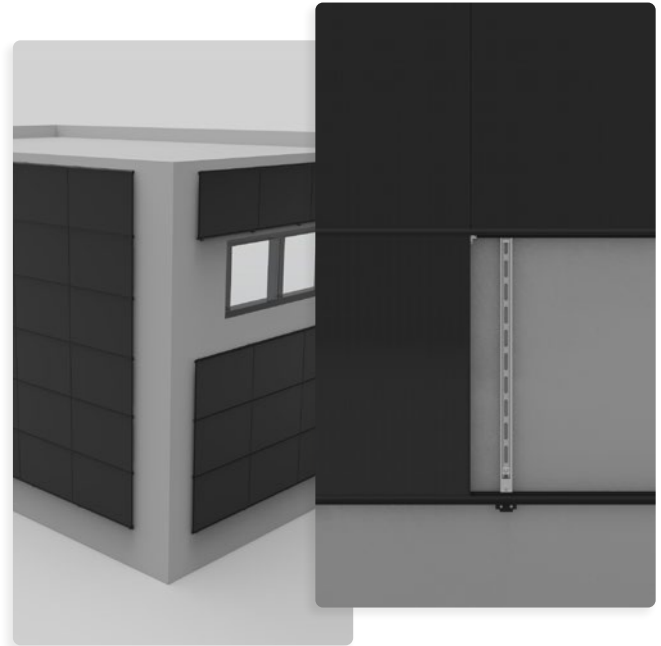

Requirements & Features	
Application	Facade
System inclination	90°
Surface	Brickwork (solid brick, vertically perforated brick, sand-lime brick), concrete
Facade attachment	Dowel and screw, fasteners provided by customer
Module orientation	Vertical and horizontal
Module dimensions	Width: 1340 mm Length (horizontal mounting): no restrictions Length (vertical mounting): 1890 mm
Distance module back/substrate	47 mm
Module attachment	Insertion system
Lightning protection	Yes
Potential bonding	Yes
Corrosion class	C4
Fire behaviour	A1
Warranty	12 years

System Setup	
Facade attachment	 Dowel & screws
Mounting rail	 C-Rail ● black & blank
Module attachment	 Insertion system evo



**Brickwork
/Concrete**