


Flat roof system III

the shortcut




+ Our system for super easy and quick installation

- Simple and quick installation thanks to a high degree of prefabrication and a tool-free click system
- Low logistical effort and optimal handling thanks to short components
- Use of our proven module clamps
- Cross connections at the edge of the module field for high stability
- Clamping on the short side of the frame
- Wind tunnel-tested aerodynamics

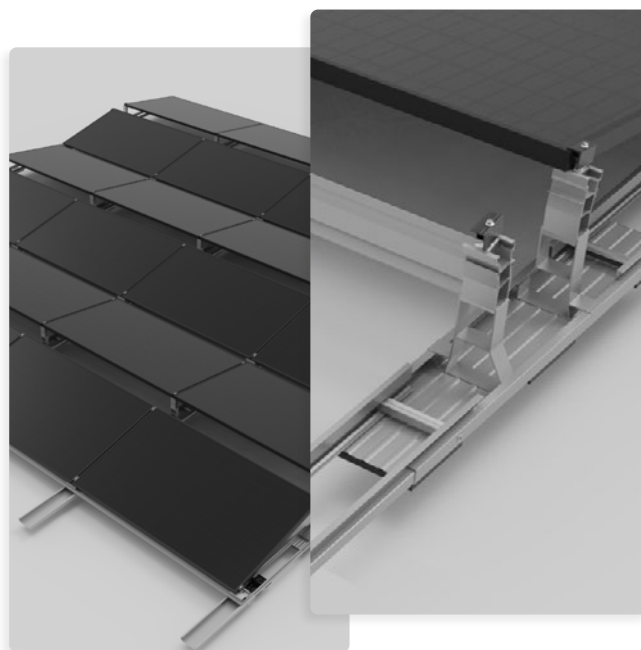


Requirements & Features	
Application	Flat roof
Building height	Without restriction
Roof pitch	0 – 5°
Roof covering	PVC, TPO, FPO, bitumen
Roof attachment	Ballast, anchors
Module orientation	East/west, south
Module attachment	Clamping system
Module dimensions	Length: up to 2280 mm
Module pitch	10° (nominal)
Module field size	Length: up to 40 m Width: up to 21 m
Row spacing	2230 – 2483 mm (depending on module width)
Distance roof edge	500 mm
Lightning protection	Yes
Potential bonding	Yes
Corrosion class	C4
Fire behaviour	A1
Warranty	12 years

System Setup	
Roof attachment	 Base and connector rails
Module supports	 Module supports 10°
Module attachment	 Middle & end clamps ● black & blank



Flat roof



Gravel roof