

Metal tile roof | clamping system

Clamping system with direct fixing and modules installed in landscape



Pre-assembled components – fast mounting

- most cost effective mounting option on metal tile roof
- module clamping in the optimum clamping range
- reduced logistical effort on the roof
- quick and efficient mounting from above
- electrically conductive connection between the mounting system and the roof membrane

product variants

- short rail C24 for the yield-optimised installation
- short rail C47 for excellent module rear ventilation with extra space to the roof covering

Your benefits


- only a handful of components, entirely pre-assembled
- low material costs and easy handling
- high holding forces thanks to chipless direct fixing with building authority-approved thin sheet screws
- only one mounting tool necessary




Middle clamp in short rail C33



Short rail C33

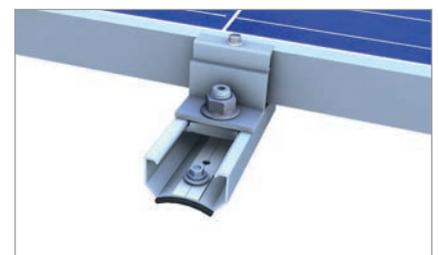


Slip guard on short rail for landscape

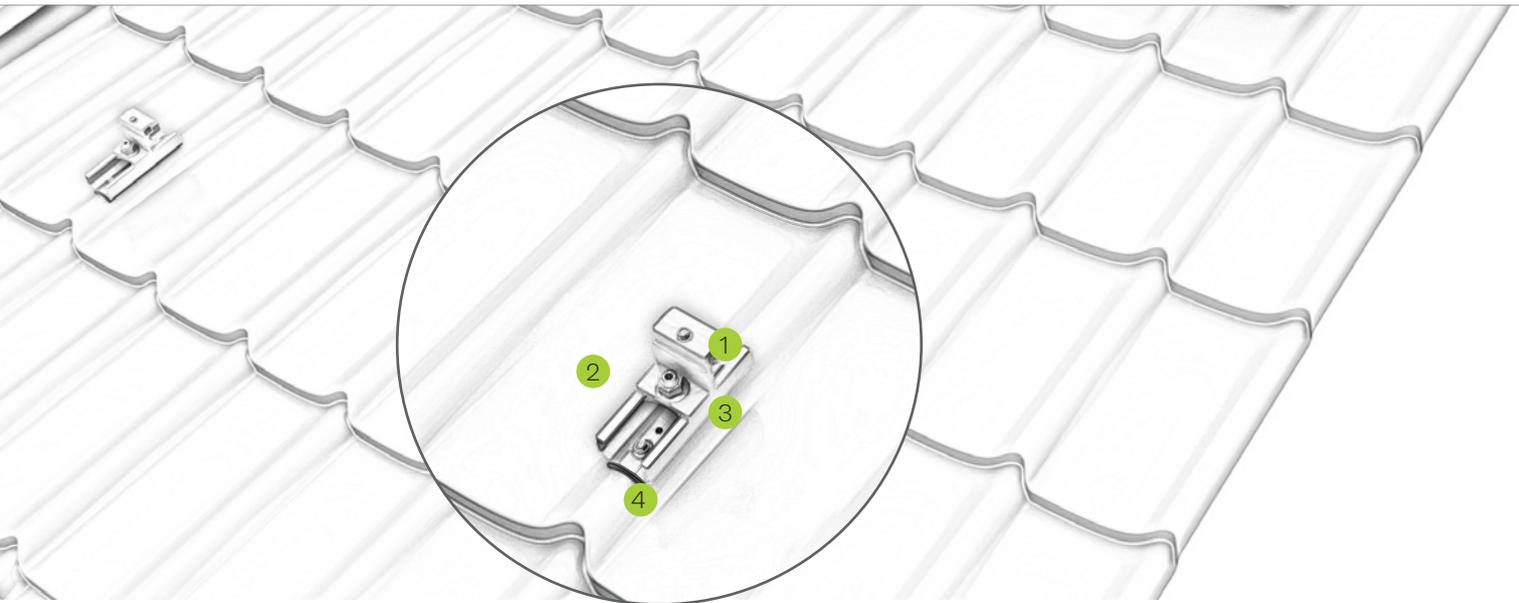

Pic Designation

- ① **Middle and end clamp**
 - for frame heights of 30-42 mm and 43-52 mm
 - available in blank and black anodized
- ② **Short rail**
 - entirely pre-assembled with EPDM-sealing and perforations
 - optimum fit on the high bead for common plates
- ③ **Slip guard**
 - mounting aid for the lowest module row
 - additional securing of modules
- ④ **Mounting screw**
 - building authority-approved for chipless direct fixing
 - high holding forces thanks to funnel formation

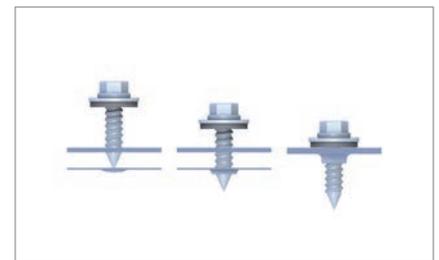

Chipless screwing for high holding forces

Mounting video



novotegra GmbH
Eisenbahnstraße 150 | 72072 Tübingen | Deutschland
Tel. +49 7071 98987-0, info@novotegra.com
www.novotegra.com

Subject to changes and errors excepted.
Last updated: April 2021 / TP